



固态、模块散热器：外形尺寸 Solid state and module radiator: external dimensions

模块、固态25-120A代号M1	三相固态10-100A代号M2	单相固态10-80A代号M3	模块、固态110-800A代号M4	模块400-800A代号M5

SS11、SS12、SS13BL、SS14BL 水冷散热器

WATER-COOLING HEATSINKS OUTLINE

SS11、SS12 单管水冷散热器

SS13BL、SS14BL 双管双连水冷散热器

型号	外形尺寸(mm)			导电排尺寸(mm)					安装尺寸(mm)									
	L	D	H	L1	H1	D1	D2	H2	H3	d	d1	d2	b	c	e	f	g	a
SS11	140	135	145.5	53	4	30	112	64	105	2-Φ9	9 × 14	M3	/	20	35	6	/	45
SS12	190	160	152	78	5	40	140	64	105	2-Φ13	11 × 14	M3	/	20	60	8	/	45
SS11BL	140	135	215	53	4	30	112	64	147	3-Φ9	9 × 14	M3	/	20	35	6	/	
SS12BL	190	160	220	78	5	40	140	64	172	3-Φ13	11 × 14	M3	/	20	65	8	/	
SS13	190	160	152	78	6	50	140	64	105	4-Φ13	11 × 13	M3	20	15	60	8	20	45
SS14	220	195	188	85	6	55	165	74	130	4-Φ13	11 × 13	M3	20	20	65	10	20	45
SS13BL	190	160	220	78	6	50	140	64	172	4-Φ13	11 × 13	M3	20	15	60	8	20	
SS14BL	220	195	268	85	6	55	165	74	210	4-Φ13	11 × 13	M3	20	20	65	10	20	

L、L1、D2、H2、H3的公差分别为±2、±2、±0.5、⁺³₋₁±3

SS15、SS15BL 水冷散热器

WATER-COOLING HEATSINKS OUTLINE

SS15 单管水冷散热器	SS15BL 双管双连水冷散热器


DSS3、DSS5、DSS8、DSS10 反并联水冷散热器

COUNTER PARALLEL CONNECTION WATER-COOLING HEATSINKS


型号	外形尺寸(mm)						安装尺寸(mm)						
	L	L1	L2	L3	H	H1	H2	H3	D1	d2	d3	Wmax	
DSS3	140	70	50	40	118	25	88	25	Φ8.2	M5 × 7	M3 × 6	135	
DSS5	200	88	57	50	130	30	100	30	Φ11	M6 × 15	M3 × 6	155	
DSS8	215	93	59.5	55	151	35	121	35	Φ11	M6 × 15	M3 × 6	155	
DSS10	230	100	62	60	190	50	160	50	Φ11	M6 × 10	M3 × 6	160	




SF12、SF13 风冷散热器 SF12 and SF13 air cooling radiators

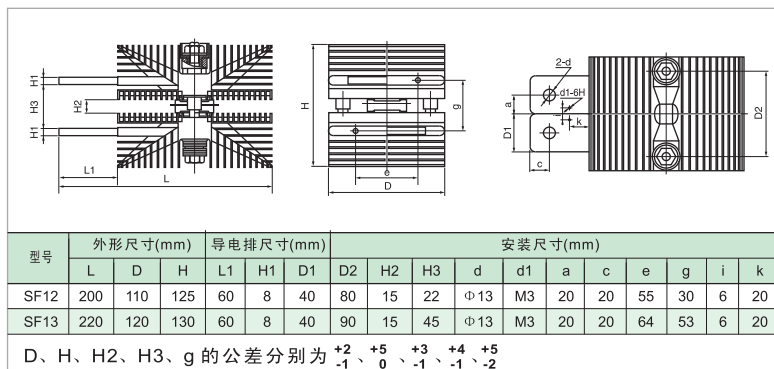


SF14、SF15、SF16、SF17 单管风冷散热器 SF14, SF15, SF16, SF17 single tube air cooling radiator

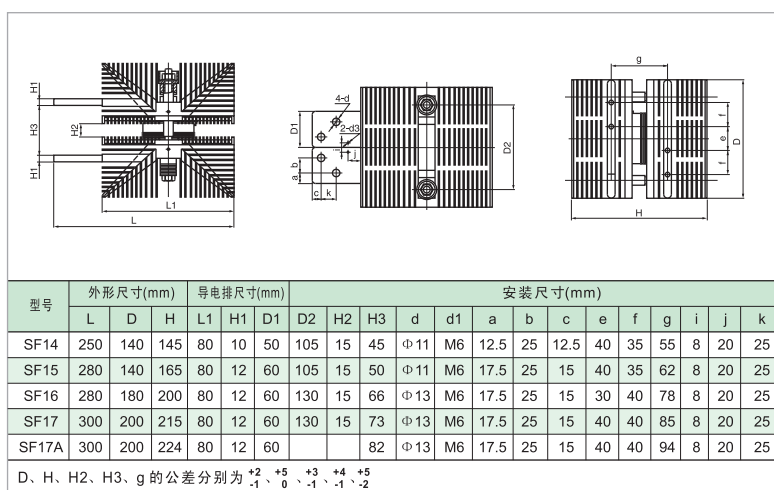


SL 软起动散热器 SL soft start radiator

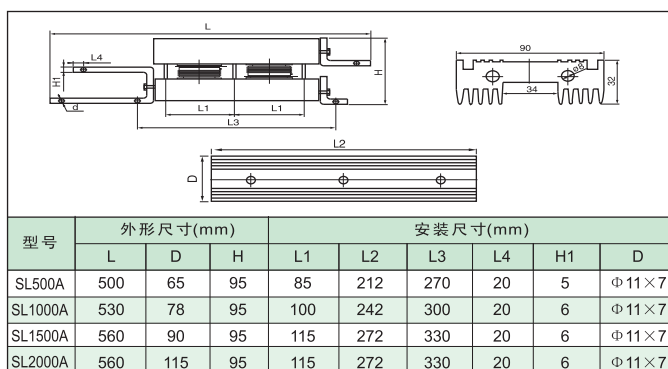

XSF 风冷反并联散热器 XSF inverse parallel air cooling radiator

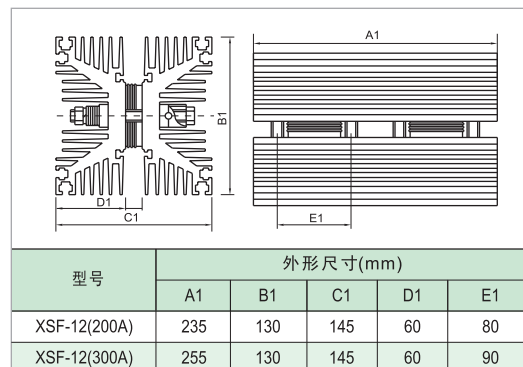

XSF 风冷反并联散热器 XSF inverse parallel air cooling radiator

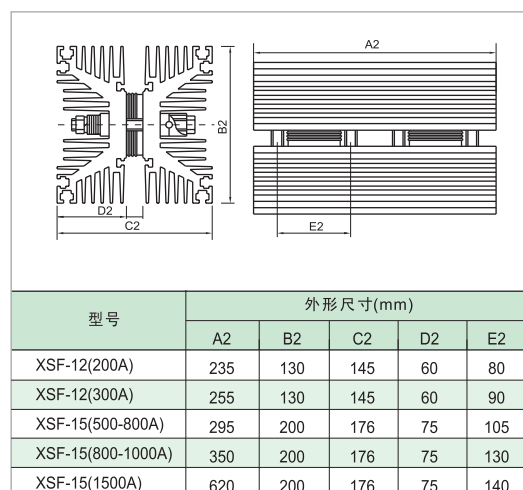

CZ 型叉指散热器 CZ interdigital radiator

